

Excellence Par Affordability

Empowering the practice of hearing across the globe with the much-awaited audiometer that meets the global standards



audiolite

PC based and stand alone diagnostic audiometer

- ❖ Pure Tone Audiometry
- ❖ Masking
- ❖ Speech
- ❖ Tone Decay Test
- ❖ Free Field Audiometry
- ❖ Wireless Audiometry



1800 123 004455 | Toll Free

www.labatasia.com



audiolite Salient Features

- ✦ Diagnostic digital audiometer
- ✦ Touch key operation
- ✦ Automatic synchronized tone and masking
- ✦ Customized and auto generation of report through PC
- ✦ Unlimited test memory
- ✦ Sturdy built for longevity
- ✦ Highly portable
- ✦ Wireless Audiometry via Bluetooth technology for Andorid/iOS Mobile or Tablet devices

Frequency Range

- AC: 125 Hz to 8000 Hz
- BC: 250 Hz to 8000 Hz

Intensity Range

- Air Conduction: -10 dB HL to +120 dB HL
- Bone Conduction: -10 dB HL to +75 dB HL

Tests

- AC/BC
- Speech
- PC Connectivity
- TDT
- Free Field*
- Wireless Audiometry*

* Available optionally with additional price.

Standard Accessories

- Labat Headphone
- Patient Response Switch
- Oticon Bone Connector
- Calibration Certificate
- Carrying Case

For technical and hardware specifications contact @ coordinator@labatasia.com



**PC/Mobile/Tablet and Printer not included.

**Specifications and features can be changed without prior notice.




Labat Asia Pvt Ltd

Plot No. 1408, Sector 82, JLPL Industrial Area, Mohali 160 062, India
info@labatasia.com | www.labatasia.com | Tel.: +91 172 2970300
 Cellphone: 9876522996 | Toll Free: 1800 123 004455



audio//soft
 AUDIOLOGY PLATFORM

AudioSoft, the statistically most advanced audiological software

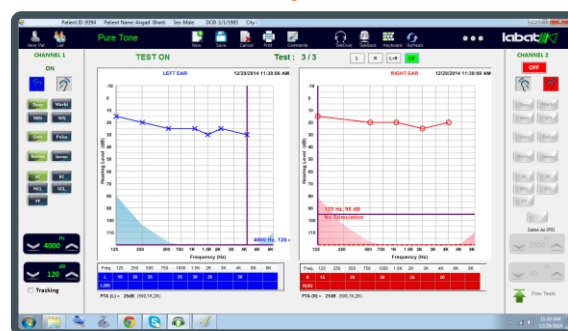

Puretone Audiometry Test Preview

Maximum Output Level (dB HL)

Frequency	125	250	500	1k	2k	3k	4k	6k	8k
AC	80	105	115	120	120	120	120	120	105
BC		40	60	65	75	70	70	40	40

Signal Mode

- Normal ON, Normal OFF
- Masking - WN, NBN, Speech
- Warble
- Pulsed (2.5 Hz, 50%, 200 + 200 ms)